

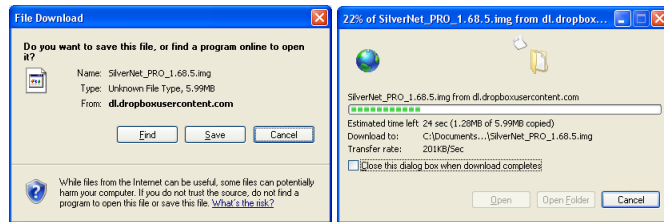



# FIRMWARE UPLOAD GUIDE


- ✓ First download the file from the SilverNet website
  - <http://silvernet.com/support/downloads-centre/>
  - In the download centre choose 'Firmware and Software' a list will appear
  - Select [Gen 2 - PICO/MICRO2/LITE/MAX/AP1200/BASE 500 & MAX 1000 Firmware](#)
  - This will begin the download, save the file to "downloads"

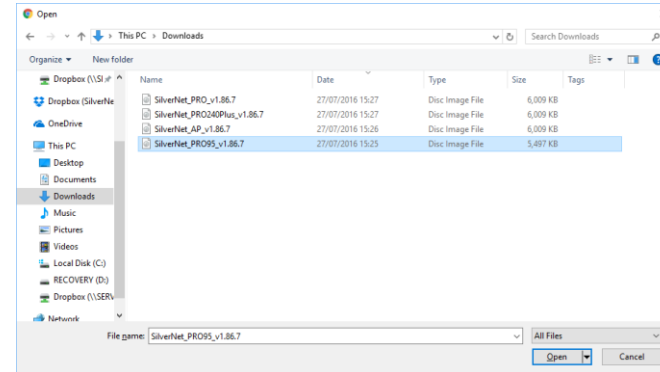

- ✓ The folder comes zipped.
  - Extract the files to your desktop or preferred place of choice.
- ✓ Login to your radio
  - Default login details are 'admin' and 'password'
- ✓ In the web settings page go to the 'ADMIN PAGE'
  - Then click on Backup/Flash Firmware
- ✓ Click 'choose file' then select where the file was saved too

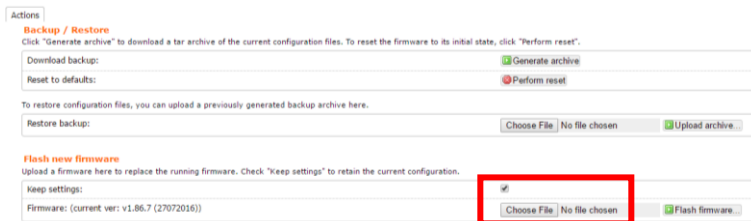

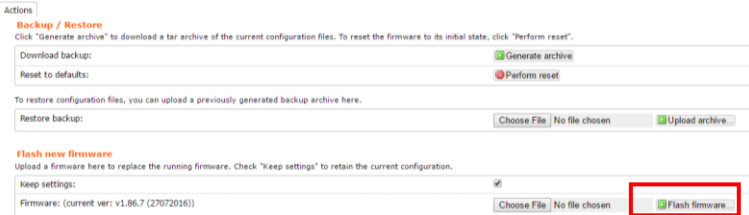- ✓ When the correct file has been selected, double click on it or click open.
  - ✓ Click the 'Flash Firmware' button
- 
- ✓ Once Firmware is verified, click 'Proceed'

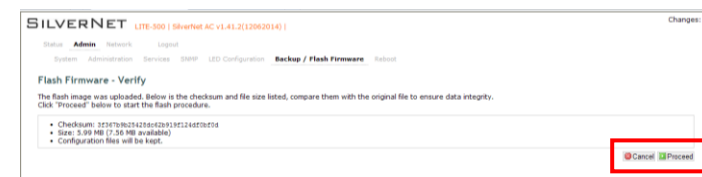

- ✓ Do not turn off the radio or refresh your browser whilst this process is running.
- ✓ After the radio has rebooted you can log back into the radio.
  - The radios configuration should remain the same unless you un-tick keep settings
- ✓ Check the firmware version number has updated

Please make sure your pc is on the same IP address range as the radio you are trying to access.