




STREAM 60 Firmware & Configuration Upload / Download Guide

GETTING STARTED

To begin, ensure your computer is within the same operating subnet range of the radio equipment. By default the equipment is shipped on 192.168.0.228 for the Client and 192.168.0.229 for the Access Point. If the equipment has been factory defaulted, the IP address will be 192.168.1.1. All subnet masks are 255.255.255.0.

Open your web browser of choice and navigate to the devices IP address. The default username and password is admin / password.


Once logged in, click on the small cog wheel icon in the top right hand corner of the interface to bring up the quick action menu.

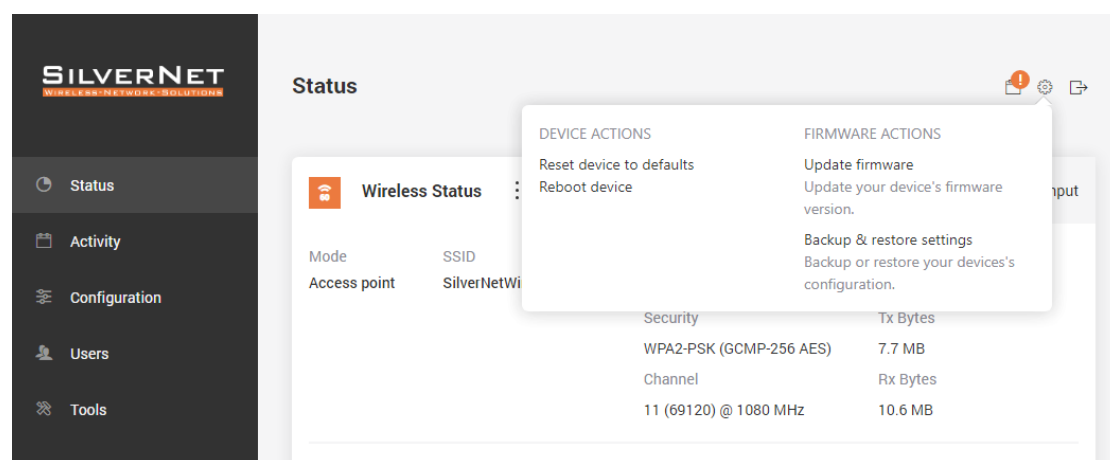

Here you will find the options to Update Firmware or Backup & Restore Settings (configuration file).

UPGRADING FIRMWARE


Click “Update Firmware” on the menu and it will bring up an additional window.

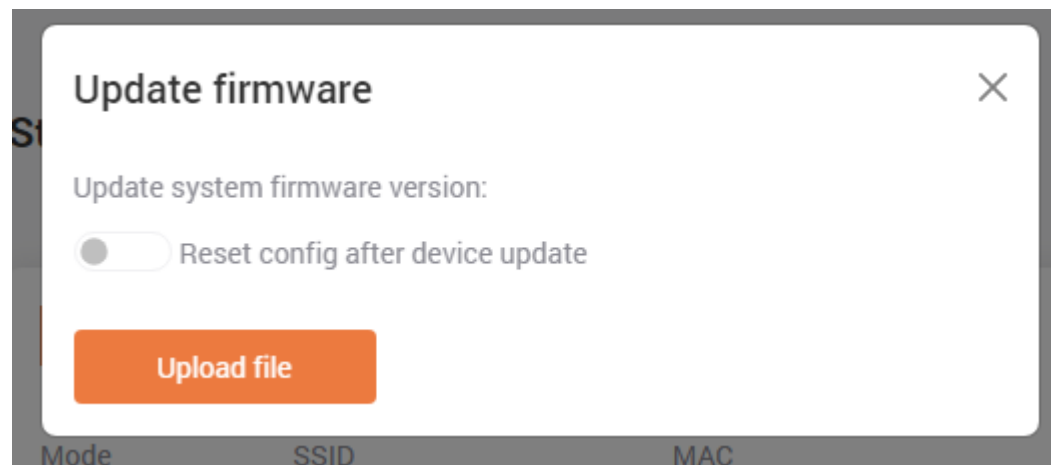

Click “Upload File” and navigate to wherever you have saved your firmware file on your computers file explorer. After opening the file the system will begin to upload the firmware immediately. You will then be asked to confirm the flashing of the firmware. Once this has been done the equipment will reboot and the firmware has been upgraded.

BACKUP & RESTORE CONFIGURATION

Picking up from the cog wheel menu, click “Backup & Restore Settings” to open a new window.

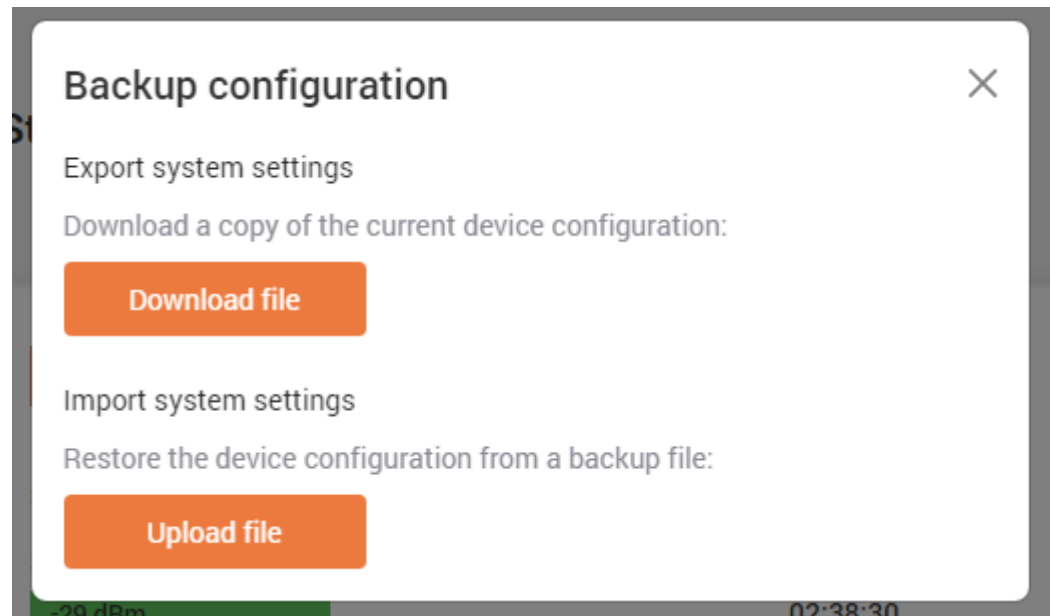

Clicking “Download File” under “Export System Settings” will automatically download a .tar file copy of the current running configuration of the device to your system’s default downloads folder.

Clicking “Upload File” under “Import System Settings” will open up your computer’s file explorer and allow you to upload a .tar file copy of a previously generated configuration. Once you have uploaded the file, click “Apply” and the system will restore with the new configuration.